




## Controlled Dehumidification IMS (CDIMS)

5931 Ford Court Brighton, MI 48116 • 810.229.7900

Fax: 810.229.7908 • sales@cdims.com • cdims.com

### MS-14500/12000-ARID-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-160	14,500/12,000*	Gas or Electric	211"	88"	104"	10,300 lbs
CDH-R-160	14,500/12,000*	Dual	221"	88"	104"	10,300 lbs

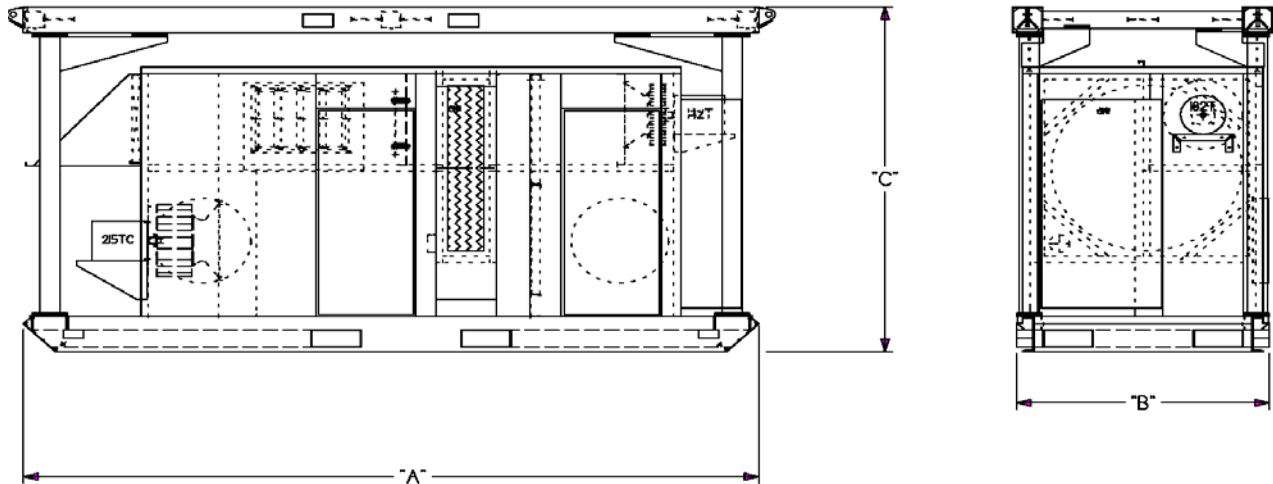

<u>MaxAir Volume</u>	<u>Moisture Removal Lbs/Hr 80°/60% RH</u>	<u>Moisture Removal Gallons/Day 80°/60% RH</u>	<u>Moisture Removal Lbs/Hr 55°/80% RH</u>	<u>Moisture Removal Gallons/Day 55°/80% RH</u>	<u>Moisture Removal Lbs/Hr 40°/80% RH</u>	<u>Moisture Removal Gallons/Day 40°/80% RH</u>
14,500	336	969	292	840	201	578

<u>Pipe Size</u>	<u>LP Inlet Pressure</u>	<u>Natural Gas Inlet Pressure</u>	<u>Electric Reactivation Load 230/1/60</u>	<u>Electric Reactivation FLA Load 460/3/60</u>	<u>Gas Reactivation FLA Load 460/3/60</u>	<u>CFH Gas Max Usage NG</u>	<u>Gallon/HR Max Usage LP</u>
1"	7-14" w.c.	7-14" w.c.	N/A	268	35	900	9.5

#### Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting with gen sets
- (3) 18" or 20" Round Connections

