





Controlled Dehumidification

5931 Ford Court Brighton, MI 48116 • 810.229.7900

Fax: 810.229.7908 • sales@ctrdh.com • ctrdh.com

MS-27500/25000-ARID-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-185	27,500/25,000	Gas or Electric	190"	101½"	101½"	15,300 lbs

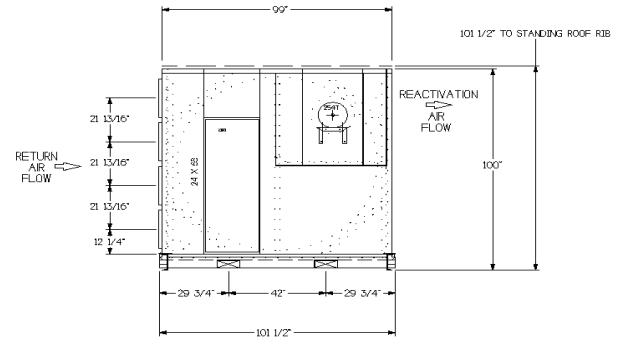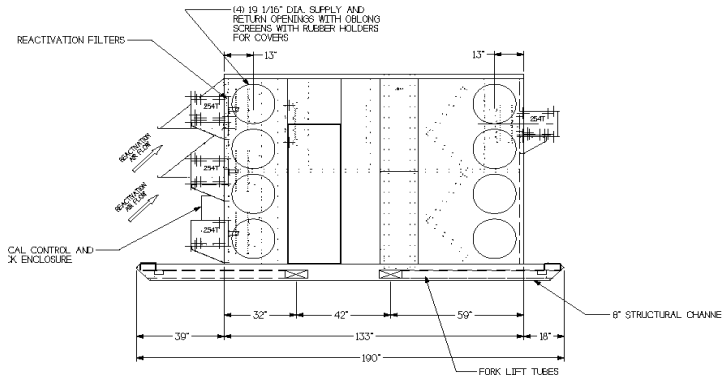

Max Air Volume	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day	Moisture Removal Lbs/Hr	Moisture Removal Gallons/Day
	80°/60% RH	80°/60% RH	55°/80% RH	55°/80% RH	40°/80% RH	40°/80% RH
27,500	683	1,967	608	1,750	408	1,175

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load	Electric Reactivation FLA Load	Gas Reactivation FLA Load	CFH Gas Max Usage	Gallon/HR Max Usage
			230/1/60	460/3/60	460/3/60	NG	LP
1"	7-14" w.c.	7-14" w.c.	N/A	640	82	1,724	18



Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- (4) 18" or 20" Round Connections