

ARID-Dry™

Controlled Dehumidification

Restoration and Construction Drying

Temporary Humidity Control


The **ARID-Dry, MS-1200** portable desiccant dehumidifier by Controlled Dehumidification is designed for the water damage and restoration professional who requires the power of **desiccant drying** and the ease of a typical refrigerant. The MS-1200 will deliver 1,200 scfm of processed air and runs on less than 50 amps of electricity at 240 volts. It's deep grain depression, portability and ease of use makes it the best choice for every water damage and restoration professional.

MS-1200 Features:

- (2) Fixed Wheels
- Remote Humidistat Connection
- 10" Round Connections
- 30% Pleated Efficiency Filters
- 304 Stainless Construction Casing
- Power Cord Kits Available



MS-1200 ARID-Dry Desiccant Dehumidifier Specifications

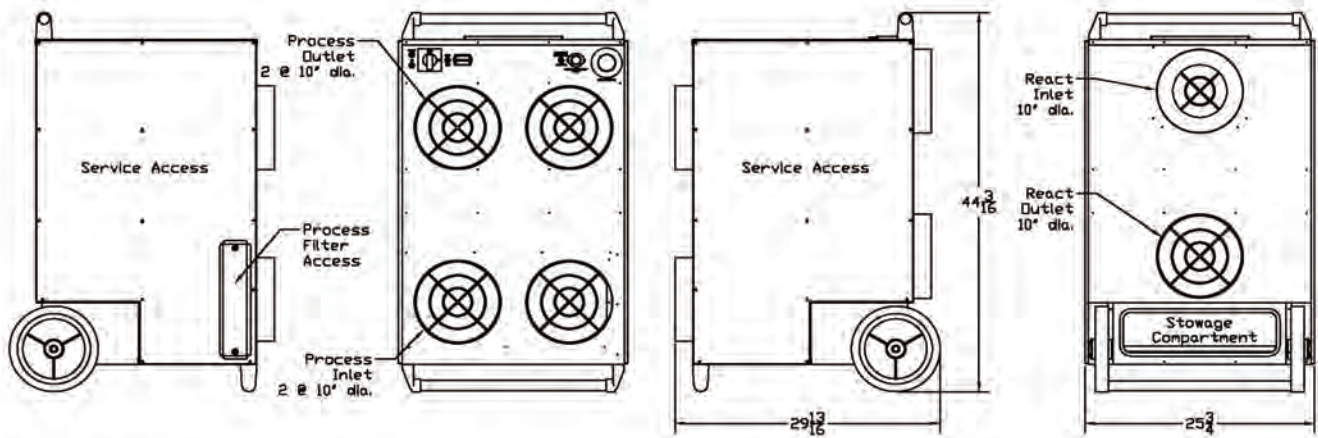

Model	MS-1200
SCFM	1,200
Fuel Type	Electric
"A" Dimension	30"
"B" Dimension	26"
"C" Dimension	44"
Weight	290 lbs
Static External Pressure	(.5"wc)
High-Moisture Removal Pints per Day 80°/60% RH	426
Low-Moisture Removal Pints per Day 80°/60% RH	216
High-Moisture Removal Pints per Day 55°/60% RH	303
Low-Moisture Removal Pints per Day 55°/60% RH	131
Low Setting 30 Amps 208 to 240 /1/60 Volts	30 A
High Setting 50 Amps 208 to 240/1/60 Volts	50 A

MS-1200 Starter Kit

Includes:

- (8) 10", 25' Mylar Duct
- (8) 6"-10" Screw Clamps

Power Cord Kit Includes:

- 4 wire 50A Adapter
- 3 wire 50A Adapter
- 25' Power Cord



The **ARID-Dry** deep drying system combines the power of desiccant dehumidification with consistent heated discharge temperatures in trailer, skid-mounted or cart configurations. **For complete drying solutions call 810.229.7900.**



ARID-Dry™
Controlled Dehumidification

The preferred choice of the water damage and restoration industry.

5931 Ford Court, Brighton, MI 48116
Fax: 810.229.7908 • sales@ctrdh.com • ctrdh.com